


Tosa Rec Pickleball Rental Information

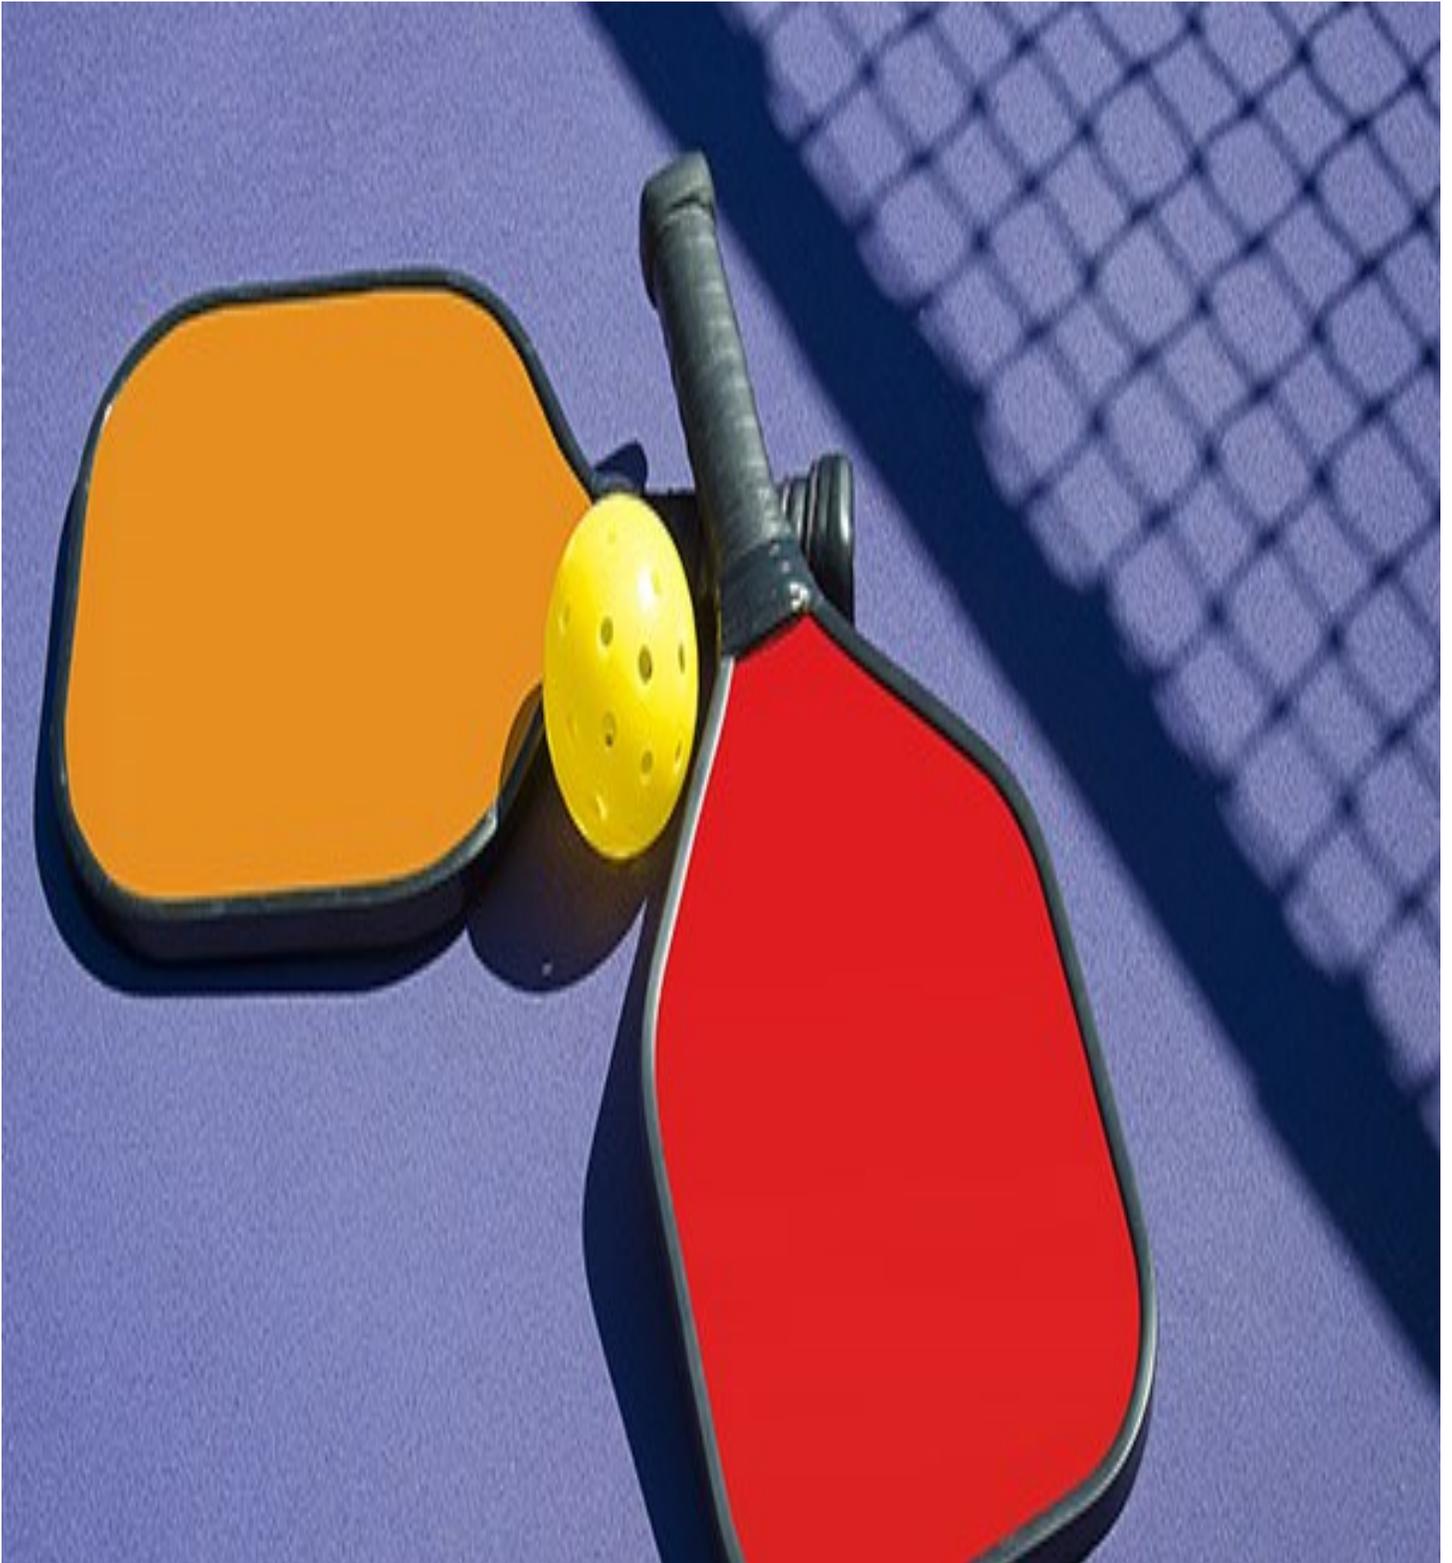

Thank you for renting a Pickleball Equipment Bag from Wauwatosa Recreation Department. The contents of your rental bag are as follows:

Pickleball Net Items:

- 6 Metal Tube Links for Net Frame
- 2 Metal Bases for Net Frame
- 2 Vertical Posts
- 2 Bent Base Tubes
- 1 Center T-Bar
- 1 Spreader Bar
- 1 Center Rod
- 1 Net

Pickleball Game Accessories:

- 4 Balls
- 4 Paddles

Please see Assembly Instructions to put together the frame and attach the net and tensions.

Assembly Instructions

See diagram on next page

1. Locate the center t-bar stand (#1). Put center spreader tube (#6) through the top hole in the t-bar stand (#1).
2. Assemble three (3 each) horizontal base tubes (#2) to each side of the center spreader tube (#6).
3. Assemble one (1 each) horizontal bent base tube (#5) to each side of the horizontal base tubes (#2).
4. Assemble the horizontal bent base tubes (#5) to the end base legs (#3) by pressing the metal pin in to attach.
5. The lower frame assembly is now complete.
6. Assemble one vertical post (#4) into the vertical tube on the end base leg (#3). Slide one end of the net over the vertical post (#4) until the net sleeve is flush with the top of the vertical post (see figure A).
7. Slide the other vertical post (#4) through the opposite end of the net and then install that vertical post (#4) into that side's end base leg (#3).
8. Locate the white tape sleeve in the middle of the net and install the thin black center rod into the sleeve (see figure B). Once fully installed in the sleeve, the rod should be inserted into the hole on the top side of the t-bar stand (#1) and the white Velcro strap on the bottom of the center sleeve should be wrapped around the t-bar stand (#1) to set the height of the center of the net (see figure C).
9. Route the net tension end straps around each vertical post (#4) and tension the net (see figure A). *If the net tension end straps are not threaded through the tension clip, then feed the strap through the bottom of the clip first, then around the center bar, and finally out the front opening of the clip. A simple tug on the excess strap will increase net tension.

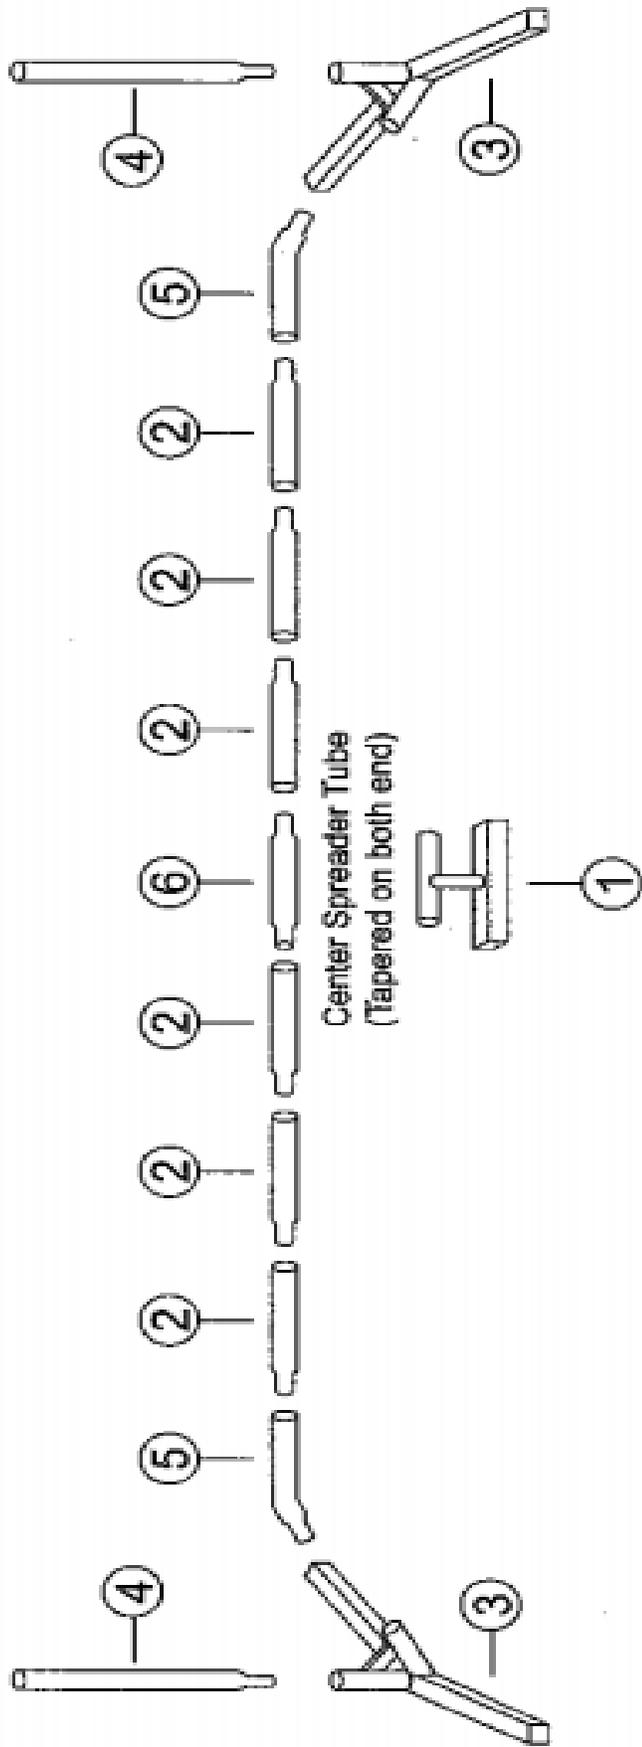


FIGURE A



FIGURE B

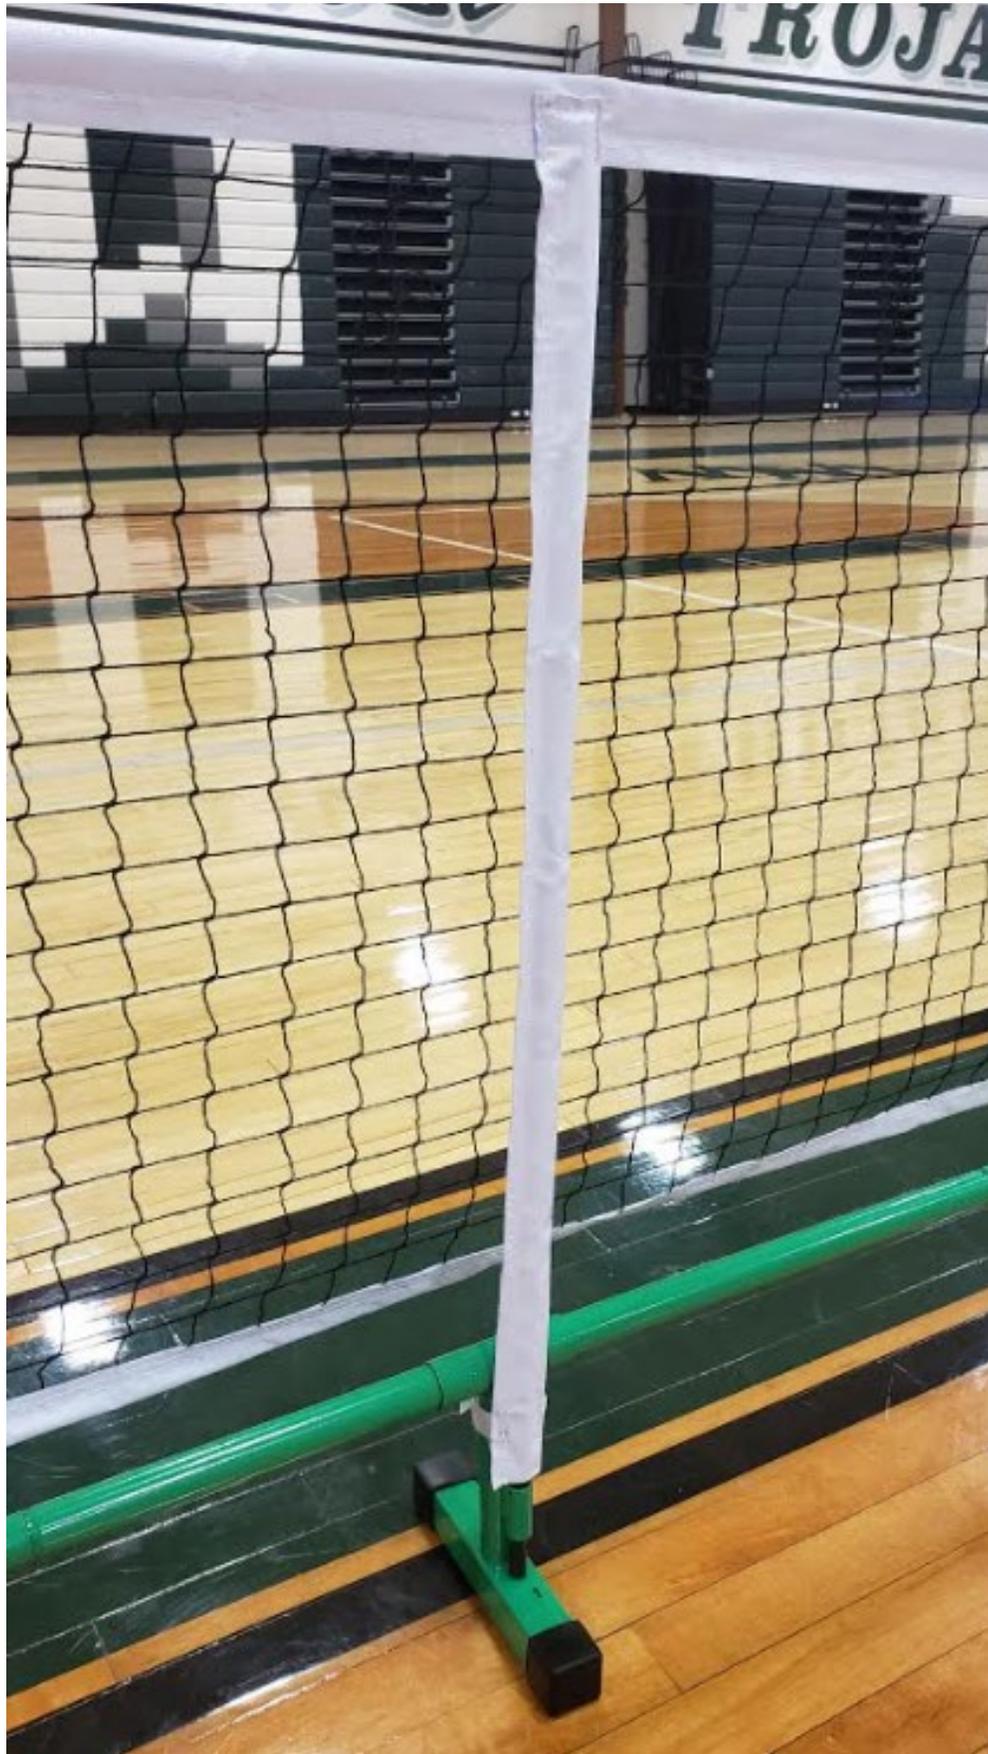


FIGURE C

